



griffin & ray

LED Lighting

T5 Tube Light



Applications

LED retrofit Tube lights are suitable for all sorts of applications such as in Hotels, Hospitals, Museums, Universities, Bars & Restaurants, Showroom, Airport, Office, School, Shopping Mall etc.

No compromise on the quality of lighting in terms on Lumen requirement and aesthetics. Looks like the traditional Tube lights with a potential saving up to 90 %.





LED T5 Tube Lights

Features

- ▶ SMD LED Technology.
- ▶ Perfect replacement for T5 fluorescent tubes
- ▶ No Halo , No Multiple Shadow Effect.
- ▶ Long Life Time 30000 to 50000 Hours.
- ▶ Cool Beam , No UV or Thermal Radiation.
- ▶ Eco-Friendly Light Source.
- ▶ Reduces Carbon Foot Print.

Product Code	Input Voltage	Watts (W)	Lumens (Lm)	Beam Angle	CRI	CCT	LED Qty	Socket	Length
GRLTL06T5WW-1F	100-240 VAC	6	480	120°	Ra>80	2700K-3000K	39	T5	288mm
GRLTL06T5CW-1F	100-240 VAC	6	480	120°	Ra>80	5500K-6000K	39	T5	288mm
GRLTL09T5WW-2F	100-240 VAC	9	950	120°	Ra>80	2700K-3000K	78	T5	549mm
GRLTL09T5CW-2F	100-240 VAC	9	950	120°	Ra>80	5500K-6000K	78	T5	549mm
GRLTL13T5WW-3F	100-240 VAC	13	1050	120°	Ra>80	2700K-3000K	91	T5	849mm
GRLTL13T5CW-3F	100-240 VAC	13	1050	120°	Ra>80	5500K-6000K	91	T5	849mm
GRLTL18T5WW-4F	100-240 VAC	18	1500	120°	Ra>80	2700K-3000K	130	T5	1149mm
GRLTL18T5CW-4F	100-240 VAC	18	1500	120°	Ra>80	5500K-6000K	130	T5	1149mm
GRLTL24T5WW-5F	100-240 VAC	24	1900	120°	Ra>80	2700K-3000K	169	T5	1449mm
GRLTL24T5CW-5F	100-240 VAC	24	1900	120°	Ra>80	5500K-6000K	169	T5	1449mm

Luminous Intensity Distribution

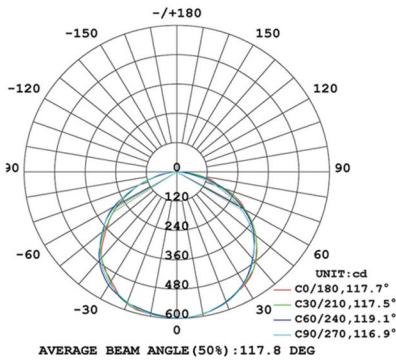

www.griffin-ray.com



Griffin & Ray Inc.

5201,
Great America Park way,
Suite 256
Santa Clara
California
USA.

- ☎ +1 408 8459411
- ☎ +1 408 7776375
- 🌐 www.griffin-ray.com
- ✉ info@griffin-ray.com